



15000 series 1D/2D barcode verifier



Features

Verification for linear and 2D codes

Three different operating positions

ISO/IEC (ANSI) compliant verification

GS1 specifications

USB powered

Lightweight and portable

Two year warranty

The 15000 series barcode verifiers are designed to read both linear and two-dimensional matrix barcodes simultaneously. All the symbols seen

in their field of view are verified individually in accordance with the appropriate ISO/IEC standards.







The verifiers are designed to be used in three different positions so that even barcodes on awkwardly shaped objects can be easily read. They are powered solely via their USB connection to a PC or laptop, and the software runs on any Microsoft supported version of Windows.

Axicon 15200 barcode verifier

Higher resolution for the smallest codes

The field of view of 60mm x 45mm means that most retail point of sale linear barcodes can be verified as well as those used on small healthcare trade items.

60mm x 45mm field of view Smallest x-dimension of 0.150 mm





Axicon 15500 barcode verifier

Largest field of view for handheld 1D/2D verificatior

The field of view - 95mm by 70mm - is the world's largest on a handheld linear and 2D barcode verifier. The size allows for even larger and multiple codes.

95mm x 70mm field of view Smallest x-dimension of 0.200 mm

Symbologies verified



Aperture reference

The software automatically identifies the symbology and its bar width (x-dimension) and adjusts the aperture size to comply with the symbology specifications and relevant ISO/IEC standard.

Free licence software

The verifier will analyse according to ISO/IEC 15415/15416.

In addition the software can also check applications, such as:

GS1 Specifications

Russian crypto codes

French CIP codes

German PZN codes


MIL. Standard 130N

Turkish healthcare codes

Unique device identification (UDI)

And more....



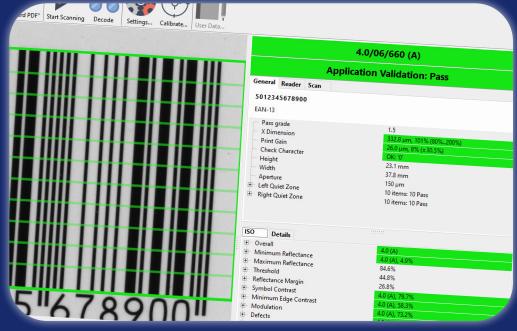

Reporting / Saving

Verification reports can be saved in various formats including:

Reports will include all ISO verification parameter grades in ISO/ANSI format.

51 Data Content (Fail): (01)07352	925352(17)1701000 Grade
ISO Parameter	3 (B)
150 Fara	4 (A)
overall	4 (A)
Decode	4 (A)
Symbol Contrast	4 (A)
Avial Non-Uniformity	3 (B)
Grid Non-Uniformity	3 (B)
Modulation	4 (A)
Reflectance Margin	
Unused Error Correction	4 (A)
Contrast Uniformity	4 (A)
Fixed Pattern Damage	4 (A)
Left "L"	4 (A)
Bottom "L"	4 (A)
Left Quiet Zone	4 (A)
Bottom Quiet Zone	4 (A)
Clock Tracks	

21 CFR part 11



Auto saving of reports, user permission controls and audit trail features enable 21 CFR part 11 compliance.

IQ/OQ/PC



Installation, operational and performance qualification available. Comprises documentation, results forms and performance test cards.



Software languages available

French (Français)

Spanish (Español)

Dutch (Nederlands)

Chinese (中文) Simplified | Traditional

German (Deutsch)

Russian (русский)

Japanese (日本人)

Polish (Polski)

Italian (Italiano)

Korean (한국어)

Danish (Dansk)

Slovenian (Slovenščina)

Hardware Specifications

Dimensions	205 x 195 x 141 mm (8"x 7.6" x 5.5")
Weight	1.28 Kg (45 oz)
Construction	Molded housing, CMOS sensor, LED illumination
Power consumption	Current draw 360mA – supplied from USB host
Wavelength of light	660 nm (red)
Calibration	N.I.S.T. traceable calibration card with certificate included
Carry case	Supplied for transport and storage
Environmental	Operating temperature: 10° to 40°C - Storage temperature: -20° to 70°C Relative humidity: 25% to 80% @ 40°C non-condensing
Regulatory approvals	CE certified, RoHS compliant





Contact

Axicon Auto ID Limited
Village Farm
Church Road
Weston on the Green
Oxfordshire
OX25 3QP
UK



Tel: +44 (0)1869 351155 Email: info@axicon.com Web: www.axicon.com

Global office locations available on our website





